


FIS LOOPBACK MODULES SC & LC

Applications


- Telecommunications Systems
- SONET Networks
- CATV Distribution Networks
- Transceiver Testing

Features


- Protective Rear Housing
- Compact Size

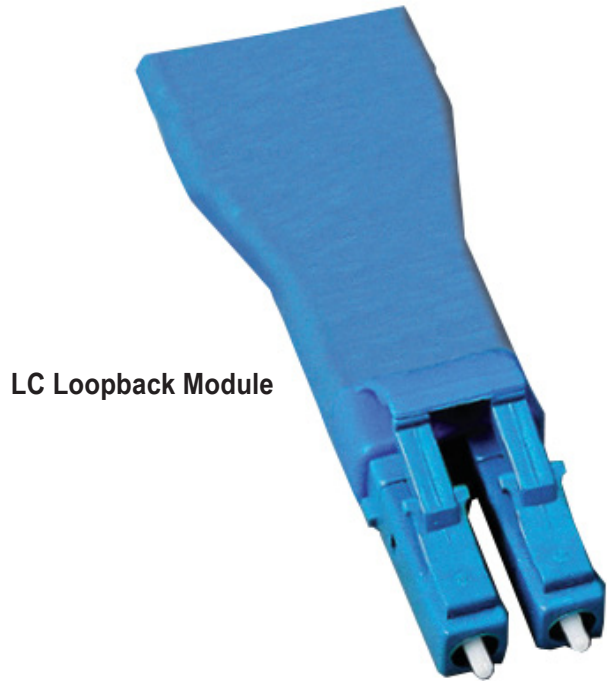

LC Loopback Module

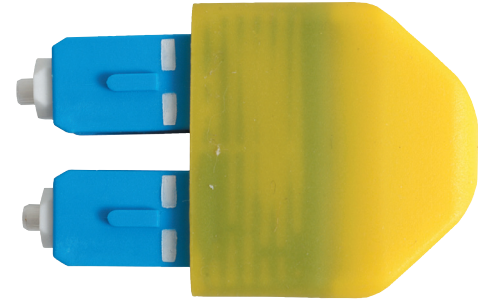

SC Loopback Module

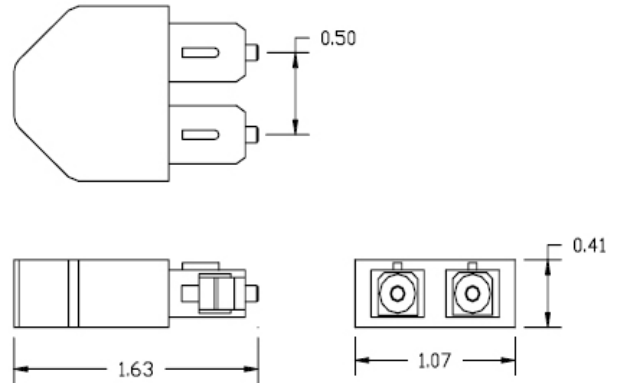

SPECIFICATIONS

Operating Temperature (°C)	-40°C to +85°C
Insertion Loss	.1 dB or less Singlemode ±1 .3 dB or less Multimode ±1

Materials	Ceramic	
Ferrules	Blue	Singlemode
Body (ABS Plastic)	Beige	Multimode
Fiber	9/125	Singlemode
	62.5/125	Multimode
	50/125	Multimode



1.800.5000.FIS

161 Clear Road • Oriskany, NY 13424
 Tel: 315.736.2206 • Fax: 315.736.2285
info@fiberinstrumentsales.com
www.fiberinstrumentsales.com

